
datasheet for MICRO-PRUEF MPS 2 0,64 FT
article number: 973995100

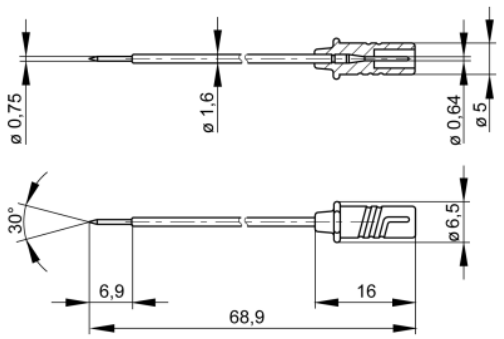

SKS Kontakttechnik GmbH

product description:	order number: 973 995-100
description:	Miniature test probe with sprung stainless steel probe tip for sampling extremely small measuring points and SMD components. Because the probe tip is sprung, it cannot slip off and provides constant pressure. Connects with MKL 0,64/25-0,25 and MAL N 4-0,64/100-0,25.
typ:	MICRO-PRUEF MPS 2 0,64 FT schwarz / black
system:	0.64mm system
order number:	973 995-100
color	●
other color versions:	●●
technical data	
measurement category acc. to IEC 61010:	CAT I
pin dimensions	0.75 mm
type of contact:	test tip (spring loaded)
type of termination:	unsprung pin Ø 0.64 mm
rated voltage:	30 VAC / 60 VDC
rated current: Please consider derating curve!	1 A
contact resistance:	16 mOhm
material	
contact material:	tip: stainless steel pin: brass
contact surface material:	tip: nickel pin: gold
housing material:	PBT
environmental conditions:	
temperature range:	-25 °C to +80 °C
inflammable class:	
housing (basic material):	UL 94 HB
drawing	

Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Wed Jul 10 2013 13:53:01)


ø 0,75
ø 1,6
ø 0,64
ø 5
30°
ø 6,5
6,9
16
68,9