
datasheet for KLEPS 2700
article number: 972307100

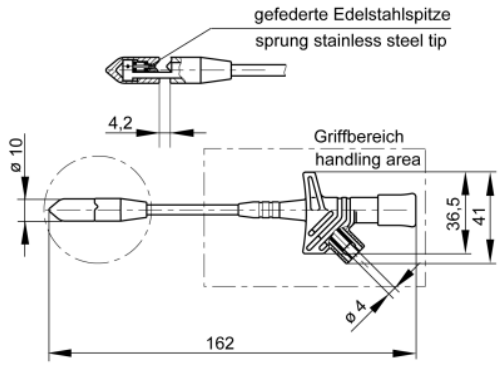

SKS Kontakttechnik GmbH

product description:	order number: 972 307-100
description:	Safety clamp-type test probe with split test clamp. The sprung stainless steel tip can contact insulated leads with cross-sections between 0.25 mm² and 1.5 mm² (3.5 mm diameter) without the need to strip them. 4 mm diameter brass socket connection.
typ:	KLEPS 2700 schwarz/black
system:	4mm safety system
order number:	972 307-100
clamping range:	3.5 mm
clamping typ:	stainless steel tip
color	●
other color versions:	●●
technical data	
measurement category acc. to IEC 61010:	CAT III
type of termination:	4 mm socket (unsprung)
rated voltage:	AC/DC 1000 V
rated current: Please consider derating curve!	10 A
contact resistance:	10 mOhm
material	
contact material:	tip: stainless steel socket: brass
contact surface material:	nickel
housing material:	PBT
environmental conditions:	
temperature range:	-25 °C to +80 °C
inflammable class:	
housing (basic material):	UL 94 HB
drawing	

Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Wed Aug 14 2013 10:47:49)


gefederte Edelstahlspitze
sprung stainless steel tip
4,2
Griffbereich
handling area
ø 10
36,5
41
ø 4
162