Low Voltage Connectors
Apparatus Clamps

Pole Clampe 4.0 mm with Anti-Twist Device, insulated

RoHS COMPLIANT



SPECIFICATION:

Current rating:	16 A
Voltage rating:	60 V DC max.
Contact resistance:	5 mΩ max.
Operating temperature:	-25°C up to 85°C

MATERIAL:


Housing:	PA6
Contact:	CuZn39Pb3-F51
Nuts:	CuZn39Pb3-F51
Washer:	ST2K60

FINISH:

Contact:	Glossy nickel plated 3-5 µm
Nuts:	Glossy nickel plated 3-5 µm
Washer:	Glossy nickel plated 3-5 µm

HANDLING:

Packing:	Bulk

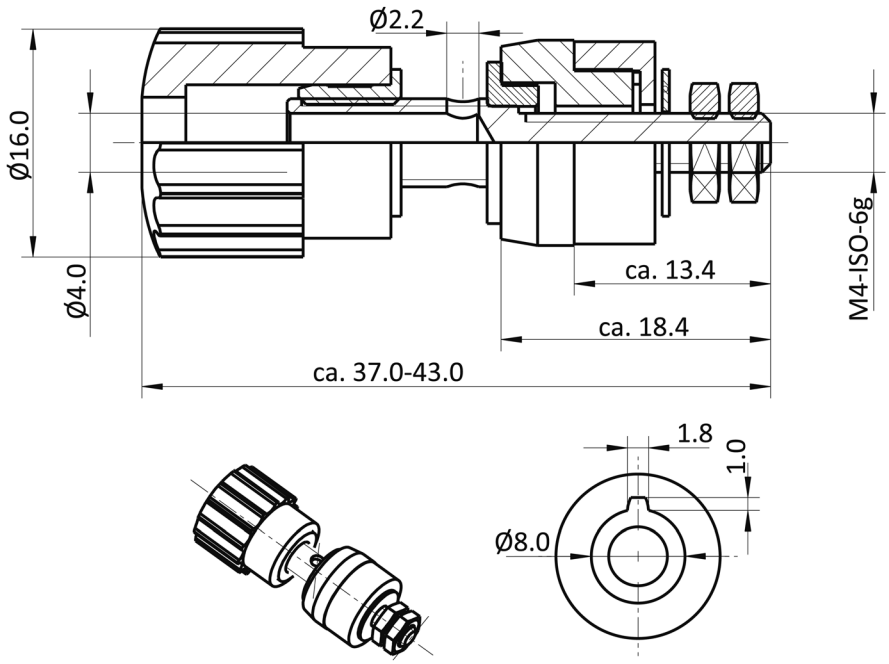

Order-Information

Identifier:	Colour:
AK6	#
Pole Clamp 4.0 mm insulated with anti-twist device	**SW:** black *
	SRT: signal red *
	BL: blue *
	GE: yellow *
	GN: green *
	WS: white
	GR: grey
	BR: brown
	OR: orange

* = standard