
datasheet for BUELA 300 K
article number: 931667100

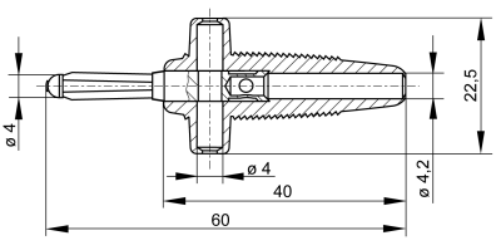

SKS Kontakttechnik GmbH

product description:	order number: 931 667-100
description:	Multiple-spring wire plug, shatter-proof, flexible insulated sleeve with transverse hole. Lateral supports provide protection against contact when plugged in at right angles. The tapering sleeve end also serves as kinking protection for the lead. Solder connection up to maximum cable cross-section of 2.5 mm².
typ:	BUELA 300 K schwarz/black
system:	4mm system
order number:	931 667-100
color	●
other color versions:	●●●●●
technical data	
measurement category acc. to IEC 61010:	CAT I
pin dimensions	4 mm
type of contact:	pin (spring loaded)
type of termination:	solder
rated voltage:	30 VAC / 60 VDC
rated current: **Please consider derating curve!**	30 A
contact resistance:	10 mOhm
material	
contact material:	brass
contact surface material:	nickel
housing material:	PVC - P
environmental conditions:	
temperature range:	-25 °C to +70 °C
drawing	
	

Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Wed Aug 14 2013 10:53:39)