
GQ16,19

Buzzer






- Φ16mm Diameter
- Sound Type(□): Continuous Buzz(M) / Incontinuous Buzz(JM)
- Voltage(▲): DC12V / DC24V
- Rated Current: ⩽30mA
- Sound Intensity: ⩾85dB(about 0.1Meter away)/ ⩾75dB(about 1Meter away)
- Crust Material(◎): Stainless steel(S)
- IP Degree: IP40,IK04

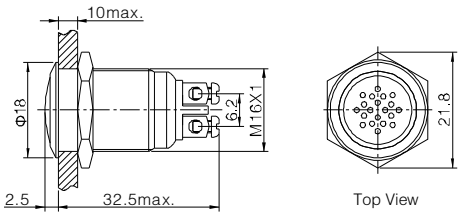




- Φ19mm Diameter
- Sound Type(□): Continuous Buzz(M) / Incontinuous Buzz(JM)
- Voltage(▲): DC12V / DC24V
- Rated Current: ⩽30mA
- Sound Intensity: ⩾85dB(about 0.1Meter away)/ ⩾75dB(about 1Meter away)
- Crust Material(◎): Stainless steel(S)
- IP Degree: IP40,IK04

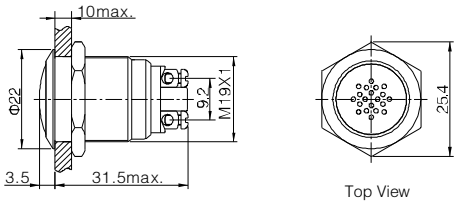




- Φ19mm Diameter
- Sound Type: Flicker Buzzer
- Color(△): R G Y O B W
- Voltage(▲): DC12V / DC24V
- Rated Current: ⩽30mA
- Sound Intensity: ⩾85dB(about 0.1Meter away)/ ⩾75dB(about 1Meter away
- Crust Material(◎): Stainless steel(S)
- IP Degree: IP40,IK04

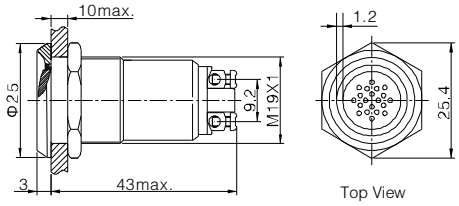



- Φ19mm Diameter
- Sound Type(■): Continuous Buzz(M) / Incontinuous Buzz(JM) /Flicker Buzzer(SM)
- Color(△): R G Y O B W
- Rated Voltage(▲): DC12V / DC24V / AC110V / AC220V
- Sound Intensity: ⩾85dB(about 0.1Meter away)/ ⩾75dB(about 1Meter away)
- Crust Material(◎): Stainless steel(S)
- IP Degree: IP40,IK04

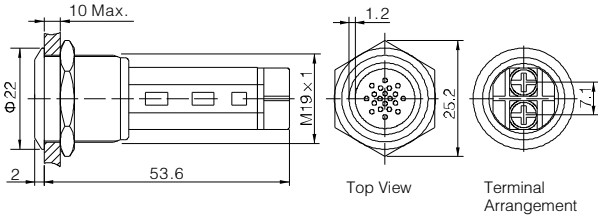

GQ16B-□/▲ GQ19B-□/▲ GQ19B-SM/△/▲ LAS1-AGQ-■/△▲		Material	Voice Cover	Stainless steel
			Body	Stainless steel
			Base	PBT
Panel Thickness	1 ~ 10mm(LAS1GQ)			
Torque	0.8Nm			
Terminal Type	Screw Terminal			
		RoHS	Made to order	