
datasheet for PRUEF 2610 FT
article number: 972318100

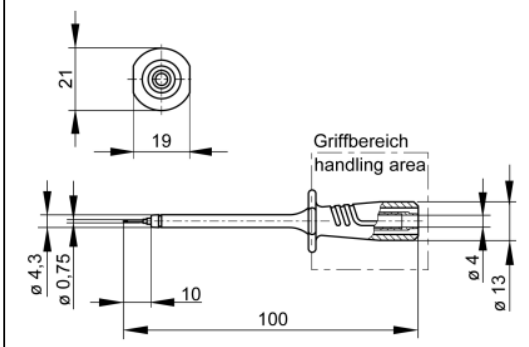

SKS Kontakttechnik GmbH

product description:	order number: 972 318-100
description:	Test probe with insulating sleeve and slender, sprung stainless steel tip. This allows a constant pressure to be applied without the tip slipping off the component, even in the smallest measuring points. 4 mm diameter brass socket connection. component part: protector and IC - tap SS 260
typ:	PRUEF 2610 FT schwarz / black
system:	4mm safety system
order number:	972 318-100
color	●
other color versions:	●●
technical data	
measurement category acc. to IEC 61010:	CAT II
pin dimensions	0.75 mm
type of contact:	test tip (spring loaded)
type of termination:	4 mm socket (unsprung)
rated voltage:	AC/DC 1000 V
rated current: Please consider derating curve!	1 A
contact resistance:	50 mOhm
material	
contact material:	tip: stainless steel socket: brass
contact surface material:	tip: rhodium socket: nickel
housing material:	PP
environmental conditions:	
temperature range:	-25 °C to +80 °C
inflammable class:	
housing (basic material):	UL 94 HB
drawing	

Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Wed Jul 10 2013 13:46:54)


21
19
Griffbereich
handling area
ø 4,3
ø 0,75
10
100
ø 4
ø 13