
# Support Post (Metric)

## Spacer Bolts DII

[ Stainless steel, metric thread ]

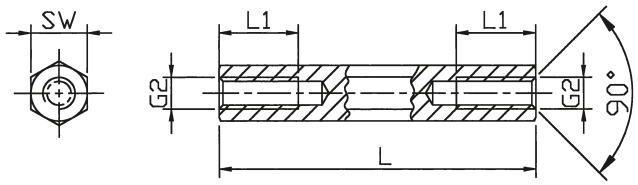


**Spacer bolts**

| | |
|---|---|
| **Type** | hexagonal |
| **Styles** | internal / internal |
| **Material** | Stainless steel 1.4305 / DMS 400 |
| **Standard Pack** | from 100 pcs |

**Internal thread lengths** [L1 in mm]

| L | M2.5+M3 | M4 | M5 | M6 | M8 |
|---|---|---|---|---|---|
| 5 | 5 | 5 | | | |
| 8 | 8 | 8 | 8 | | |
| 10 | 10 | 10 | 10 | 10 | |
| 12 | 12 | 12 | 12 | 12 | |
| 15 | 7 | 15 | 15 | 15 | 15 |
| 18 | 7 | 9 | 9 | 9 | 18 |
| 20 | 7 | 9 | 10 | 10 | 20 |
| 25 | 7 | 9 | 10 | 12 | 12 |
| from 30 | 7 | 9 | 10 | 12 | 14 |



**Minimum tensile strength: 750 N/mm2**
**Tolerance for lenght dimensions: +/- 0,1 mm**
**(applies to SW 13 : DIN 2768-m)**

**Lengths** [mm]

| Order No. | SW (hexagonal) | Thread | 05 | 08 | 10 | 12 | 15 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 142 x (length) | SW 5 | M2,5 | 05 | 08 | 10 | 12 | 15 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | | | | | | | | |
| 144 x | SW 5,5 | M3 | 05 | 08 | 10 | 12 | 15 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | | | | | | |
| 146 x | SW 7 | M4 | 05 | 08 | 10 | 12 | 15 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |
| 148 x | SW 8 | M5 | | 08 | 10 | 12 | 15 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |
| 149 x | SW 10 | M6 | | | 10 | 12 | 15 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |
| 1413 x | SW 13 | M8 | | | | | 15 | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | | 60 | | 70 | | 80 | | 90 | | 100 |

**SW:** width across flats
**Ordering example:**146 x 50 = DII / 1.4305 / SW 7 / M4 x 50