
SW-GQ25FSL

ANTI-VANDAL PUSH BUTTON



- Φ25mm diameter
- Switch Rating:5A/250VAC
- Contact Configuration:1NO1NC / 2NO2NC
- Operation Type: Momentary
- The crust material: Stainless Steel
- IP Degree:IP65

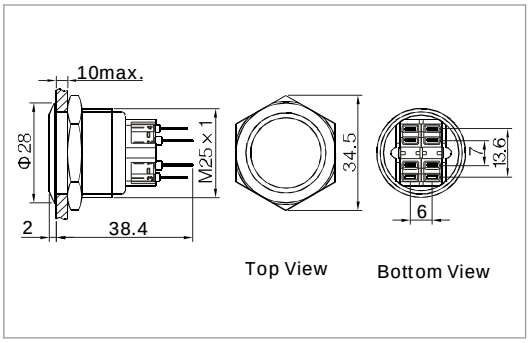

Specification				SW-GQ25FSL
The Front Shape				Flat Round
Terminal Type				Pin Terminal(2.8×0.5mm)
Switching				No.2
Max.Switch Rating				Ith:5A Ui:250VAC
Contact Resistance				≤50mΩ
Insulation Resistance				≥1000MΩ
Dielectric Strengh				2000VAC
Operating Temp				-20℃ ~ +55℃
Mechanical life				1,000,000 cycles
Electrical life				50,000 cycles
Panel Thickness				1~6mm
Torque				5~14Nm
Operation Pressure				5.5~7N
Operation Distance				About2.8mm
IP Degree				IP65
Material	Contact			Silver Alloy
	Button			Stainless Steel
	Body			Stainless Steel
	Base			PA
	RoHS			Made to order