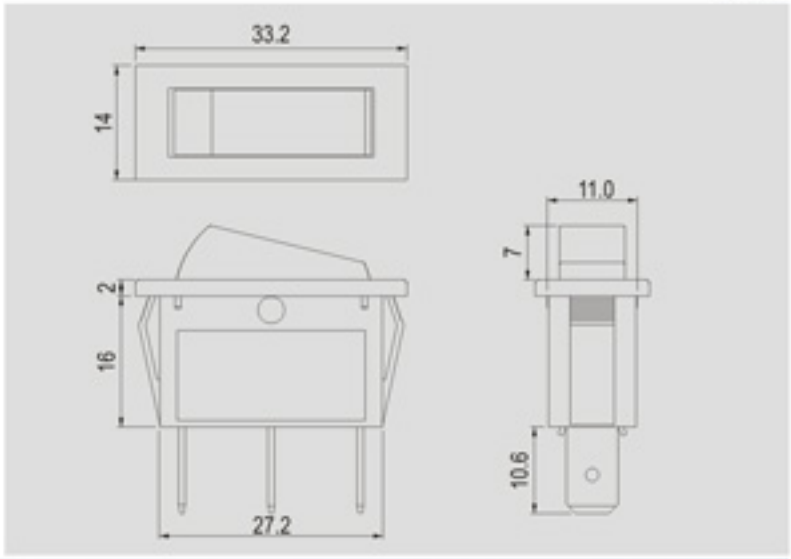
R13-70.91






Rating
16A 125V AC 1/8HP 125VAC 10A 250V AC 1/3HP 250VAC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

X
Y

	X	Y
0.75~1.25	30.2-0.1	11.2+0.1
1.25~2	30.4-0.1	11.2+0.1
2~3	30.8-0.1	11.2+0.1

Cut-out for X8 ROCKER



	X	Y
0.75~1.25	30.2-0.1	11.2+0.1
1.25~2.0	30.4-0.1	11.2+0.1
2.0~3.0	30.8-0.1	11.2+0.1

FEATURES

* MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
* Illuminated actuators are molded in PC, available with red, amber and green colors.
* Snap-in mounting, easy to install switch into panel.
* The dimension of frame is 33.2*14, for shorter dimension of frame 31.5*14, please refer to page 1-23, item NO. R13-221.
* SO terminal is not available for function H & I.




Ordering number instruction


R13- □□ □□□ - □□

ROCKER

7 0




9 1



FUNCTION


Different position（動作特性不同）

A



C


D


Illuminated（帶燈）


B



Momentary / Illuminated （彈回/帶燈）

B F


Momentary（彈回）


F



H



I



Waterproof（防水）


A 8


B 8


B 8 F


C 8


D 8


F 8


TERMINAL

0 1 .250" SQ

0 5 SO