
R13-527





Rating
10A 125V AC 1/2HP 6A 250V AC 1/2HP
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out

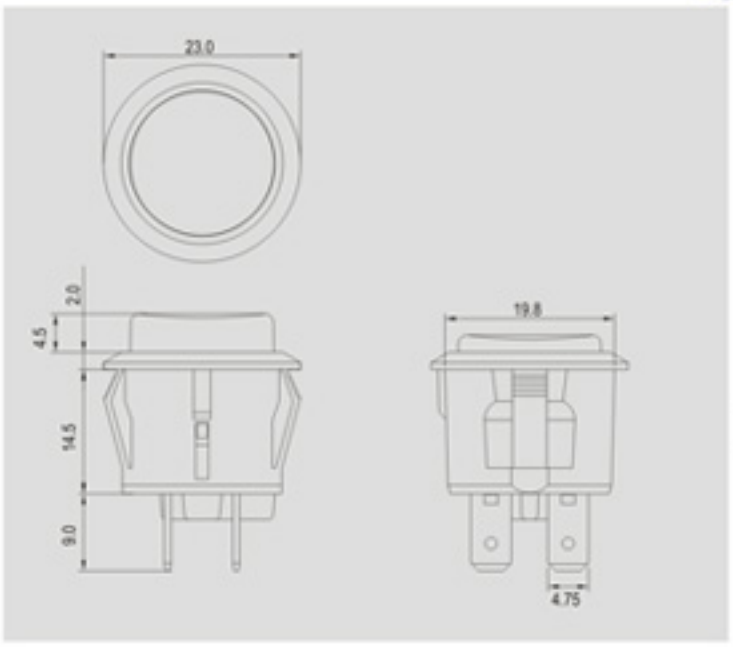


0.7~3.0 mm max

Cut-out for X2 BUTTON



0.7~2.5 mm max

BUTTON

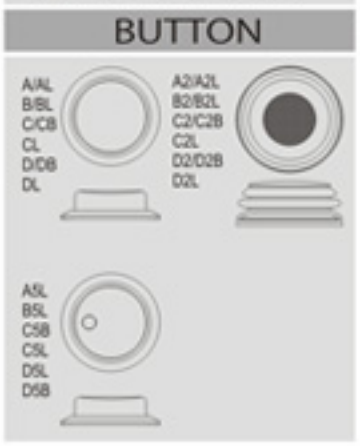

FEATURES

* MATERIAL: Frames are nylon (UL flame:94V-2). Terminals are silver plated brass.
* Illuminated actuators are molded in PC, available with red, amber and green colors.
* Snap-in mounting, easy to install switch into panel.
* Water proof and dust proof to fit IP-65.




Ordering number instruction

R13-527 □□□ - □□

FUNCTION


Non-illuminated button（不帶燈）

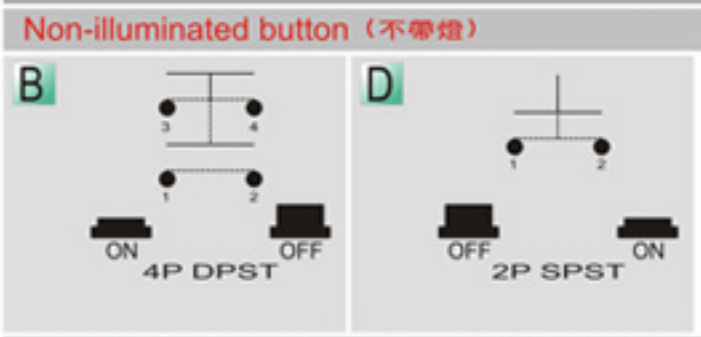


Illuminated / Different button（帶燈/按鈕不同）




Momentary / Non-illuminated button（彈回/不帶燈）

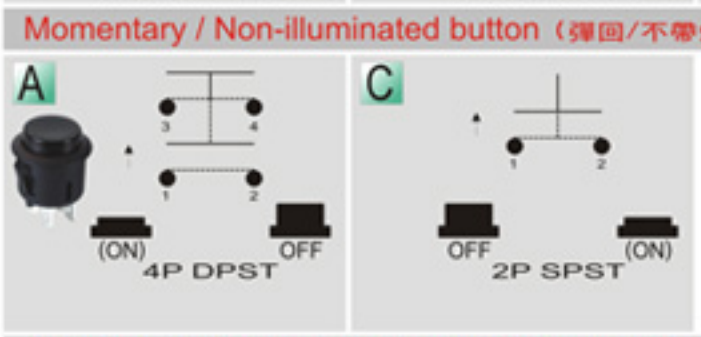


Momentary / Non-illuminated / Different button（彈回/不帶燈/按鈕不同）

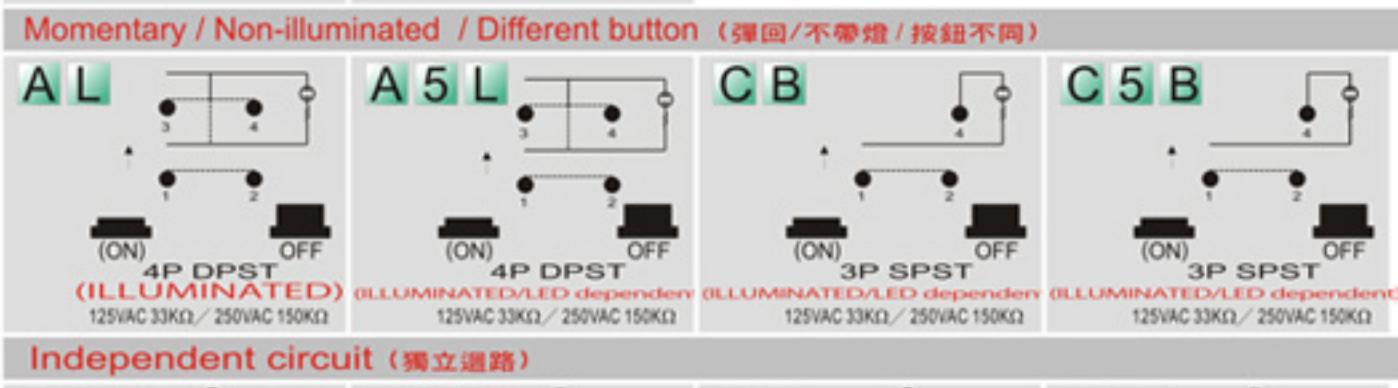

Independent circuit（獨立迴路）

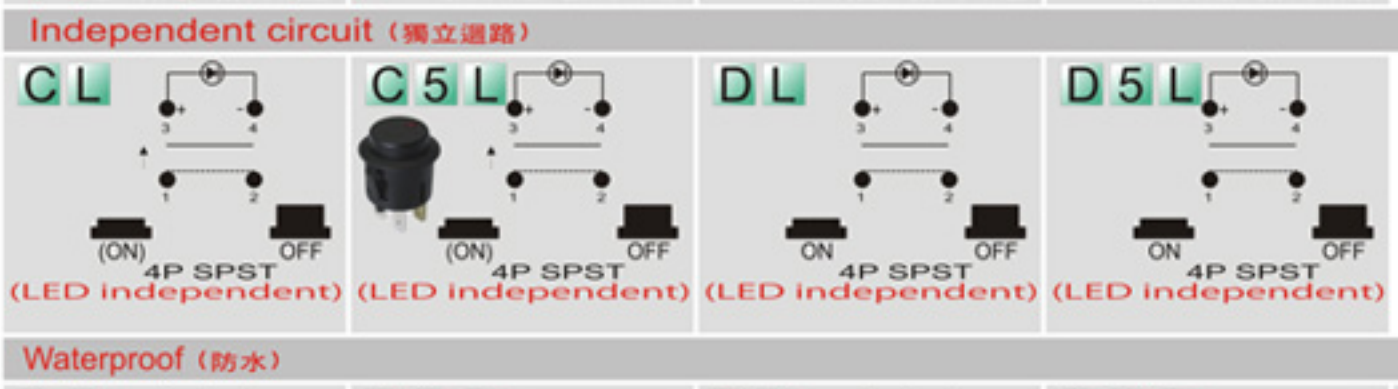

Waterproof（防水）

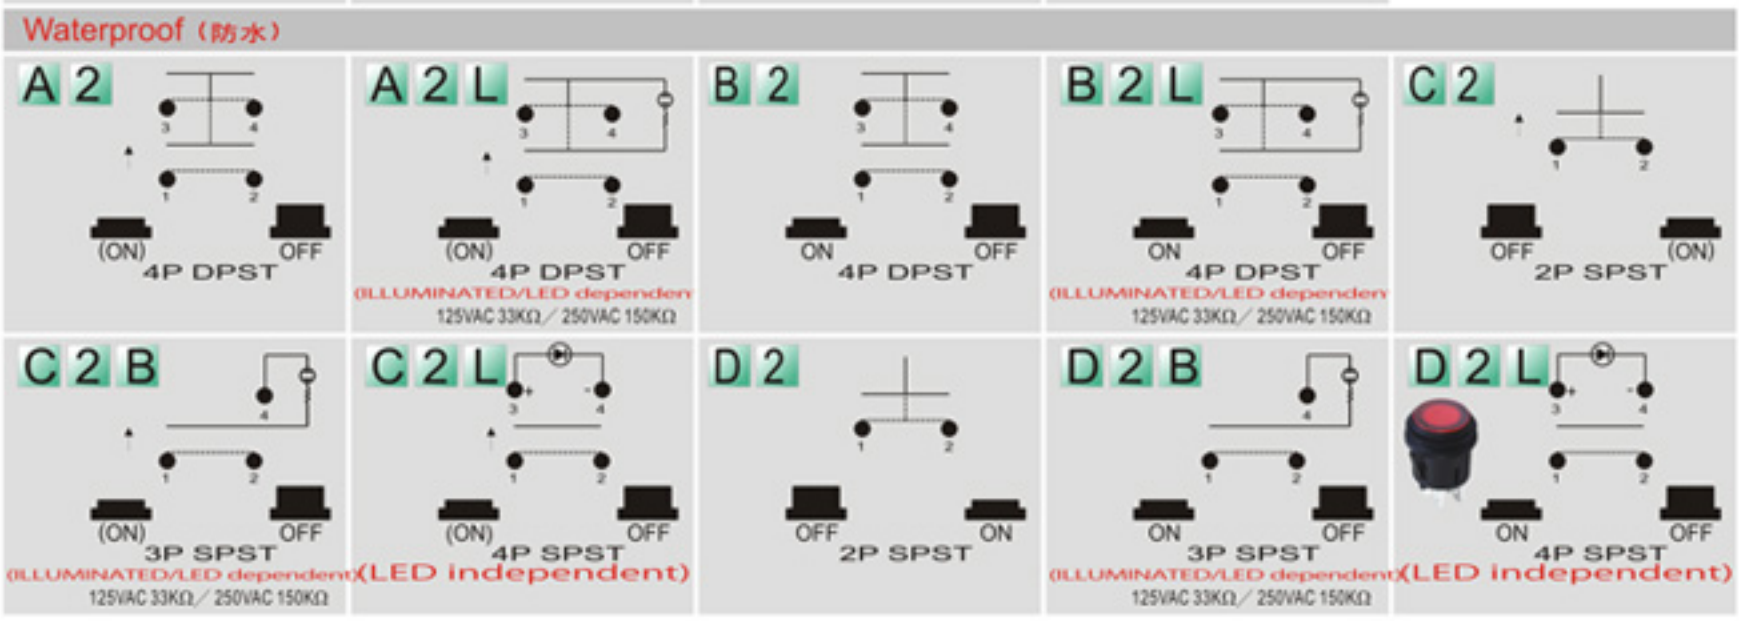

TERMINAL

0 2 .187" SQ