
ONPOW






LAS2GQ Series

Anti-vandal metal push button

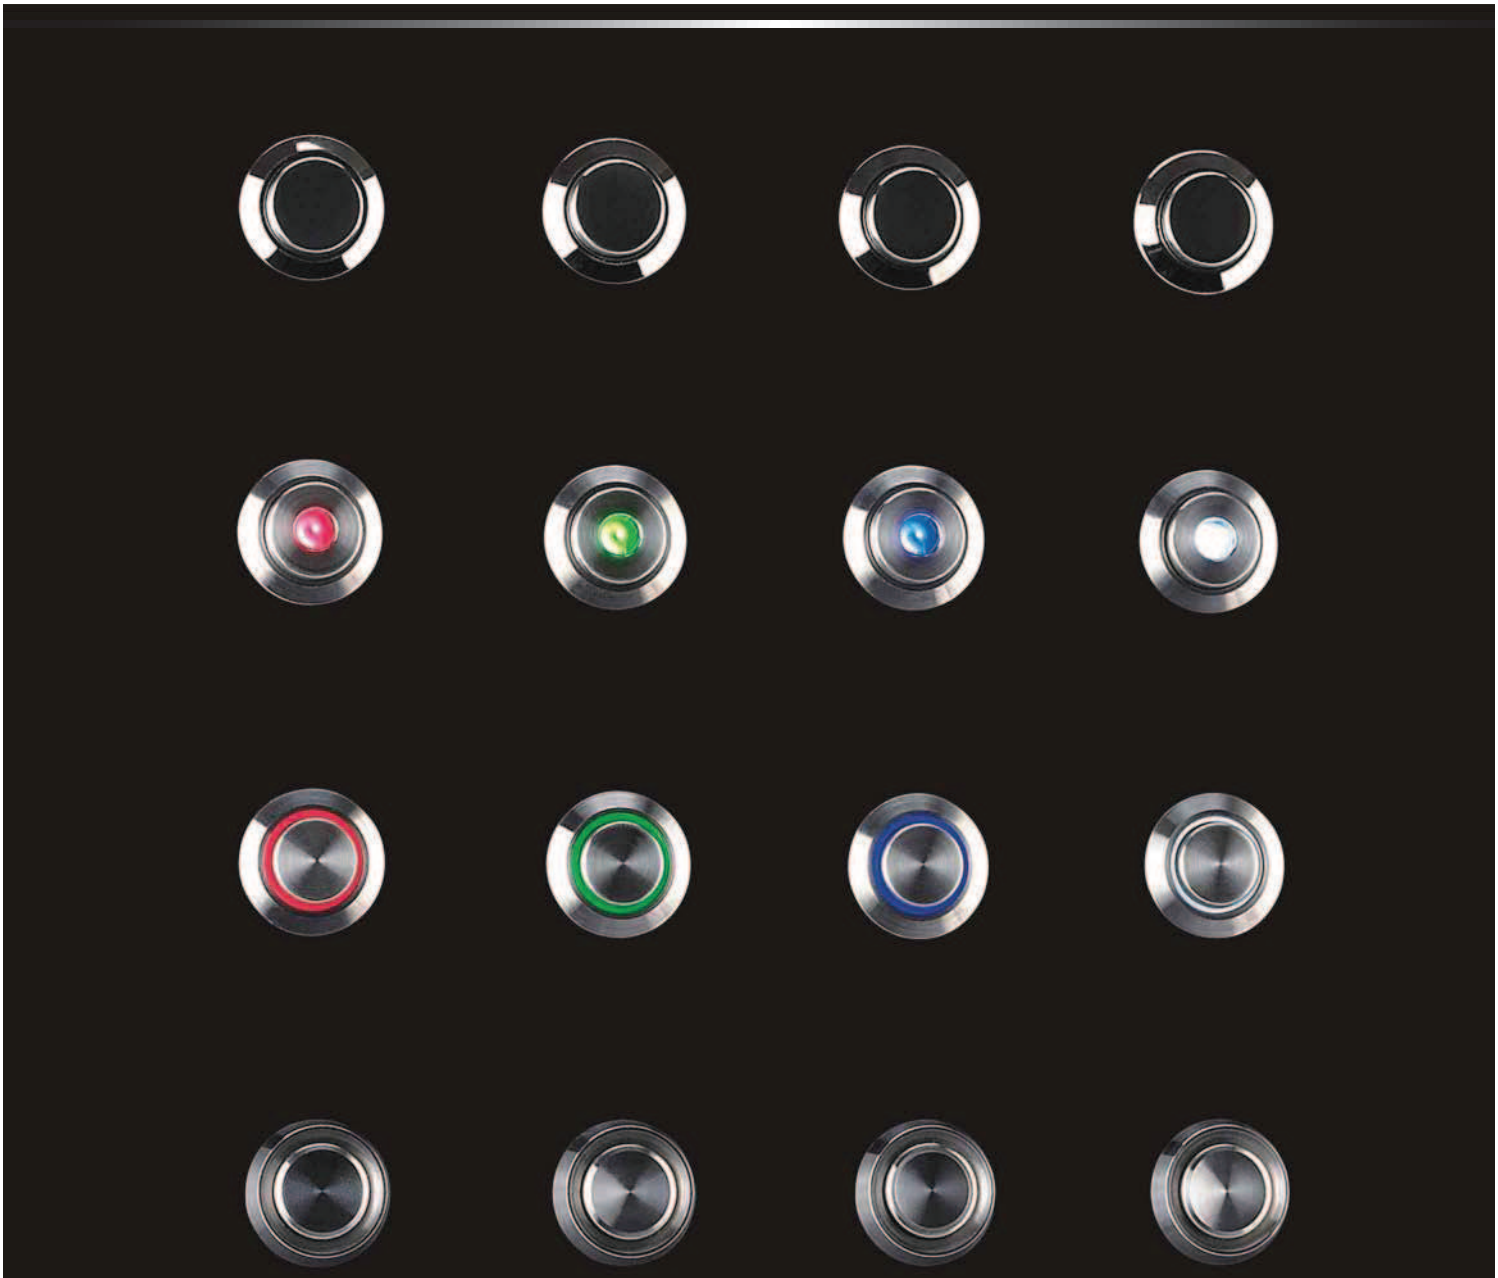


- Φ16mm Diameter
- Switch Rating: 3A/250VAC
- Contact Configuration: 1NO1NC/2NO2NC
- Operation Type: Momentary/Latching
- The Front Shape: Concave Round
- The Crust Material: Stainless Steel/ Nickel Plated Brass
- IP Degree:IP67, IK10

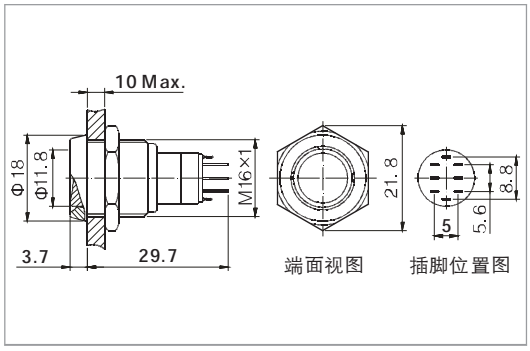

Anti-vandal metal push button



- Φ16mm Diameter
- Switch Rating: 3A/250VAC
- Contact Configuration: 1NO1NC/2NO2NC
- Operation Type: Momentary/Latching
- The Front Shape: High Concave Round
- The Crust Material: Stainless Steel/ Nickel Plated Brass
- IP Degree:IP67, IK09
- Head Color: R/G/Y/O/B/W/N

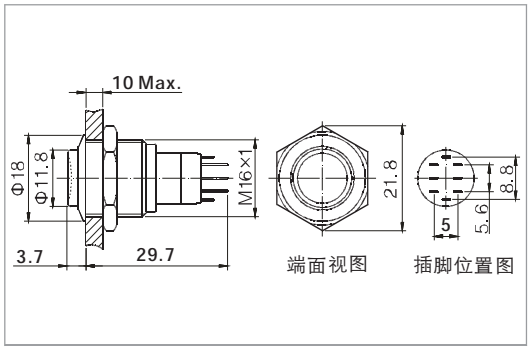

Specification		LAS2GQC-□■/◎/☆	LAS2GQG-□■/△/◎/☆
The Front Shape		Concave Round	High Concave Round
Terminal Type		Pin Terminal(1.8×0.4mm)	Pin Terminal(1.8×0.4mm)
Switching		C(single-break fast-motion changeover contact)	C(single-break fast-motion changeover contact)
Max. Switch Rating		Ith:3A Ui:250VAC	Ith:3A Ui:250VAC
Contact Resistance		≤50mΩ	≤50mΩ
Insulation Resistance		≥1000MΩ	≥1000MΩ
Dielectric Intensity		2000VAC	2000VAC
Operating Temp		-20℃ ~ +55℃	-20℃ ~ +55℃
Mechanical Life		200,000 cycles	200,000 cycles
Electrical Life		50,000 cycles	50,000 cycles
Panel Thickness		1~10mm	1~10mm
Torque		5~14Nm	5~14Nm
Operation Pressure		2.5~4N	2.5~4N
Operation Travel		About 2.8mm	About 2.8mm
IP Degree		IP40/IP67,IK10	IP40/IP67,IK09
Head Color		Machine brushed	R G Y O B W N
Material	Contact	Silver Alloy	Silver Alloy
	Button	Stainless Steel/Nickel Plated Brass	Zn-Al Alloy
	Body	Stainless Steel/Nickel Plated Brass	Stainless Steel/Nickel Plated Brass
	Base	PBT	PBT
	RoHS	Made to order	Made to order