

R13-508

Screw Type



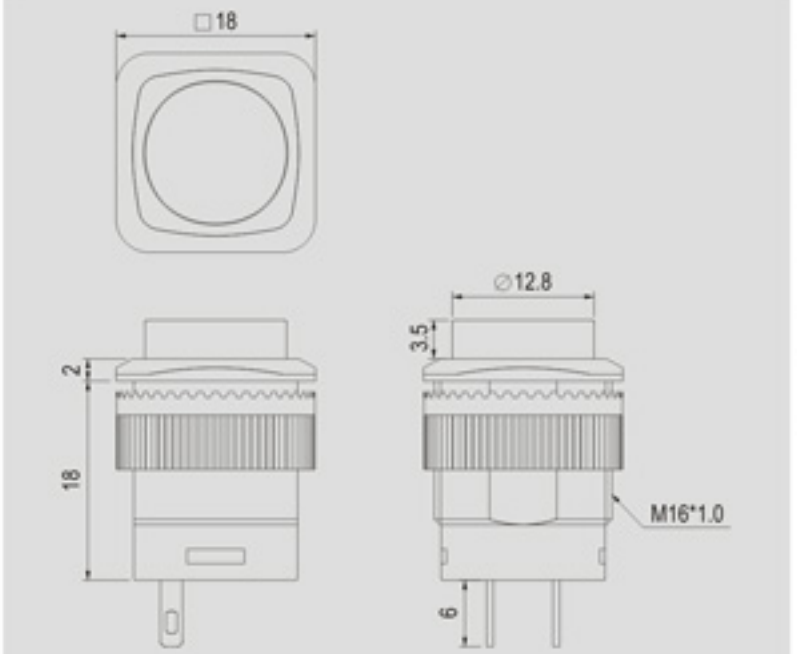

Rating
3A 125V AC 1.5A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out





7 mm max

FEATURES

* MATERIAL: Frames are nylon with glass fiber (UL flame: 94V-2). Terminals are silver plated brass.
* Illuminated actuator are molded in PC, available with red, amber and green colors.
* Mounted by nut.

R13-508 ☐☐-☐☐

FUNCTION	BUTTON	TERMINAL
A 	W/O LED	05 SO
B 	L With LED (3VDC)	

* ( ) =momentary