
datasheet for PKI 100
article number: 930757100

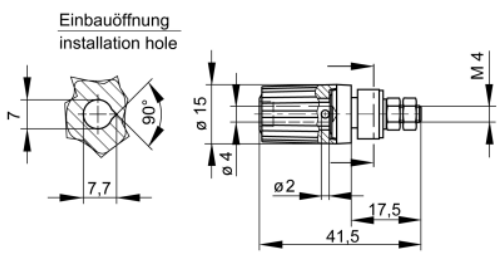

SKS Kontakttechnik GmbH

product description:	order number: 930 757-100
description:	Pole terminal with captive insulated head, which is held under constant pressure against the insulated rings by a spring. 4 mm diameter nickel-plated, brass threaded bolt with 2 mm diameter transverse hole. For non-rotating installation in switchpanels and equipment chassis with wall thickness up to 3.5 mm.
typ:	PKI 100 schwarz/black
system:	4mm system
order number:	930 757-100
color	●
other color versions:	●●●●●●●
technical data	
measurement category acc. to IEC 61010:	CAT I
type of contact:	4 mm socket (unsprung), 2 mm cross hole
type of termination:	M4 thread
rated voltage:	30 VAC / 60 VDC
rated current: Please consider derating curve!	35 A
contact resistance:	2 mOhm
mounting:	screw
material	
contact material:	brass
contact surface material:	nickel
housing material:	PA
environmental conditions:	
temperature range:	-25 °C to +100 °C
inflammable class:	
housing (basic material):	UL 94 V - 2
drawing	

Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Wed Jul 10 2013 13:59:33)


Einbauöffnung
installation hole
7
90°
7,7
ø 15
ø 4
ø2
17,5
41,5
M 4