
MINIATURE TOGGLE SWITCH
小型雙投開關

SPECIFICATIONS

CONTACT RATING—5 amps with resistive load @ 120VAC or 28VDC;
2 amps with resistive load @ 250VAC.
ELECTRICAL LIFE—50,000 make-and-break cycles at full load
CONTACT RESISTANCE—10 milliohms max. initial @ 2-4VDC,
100 milliamps for both coin silver and gold plated contacts.
INSULATION RESISTANCE—100 megohms min.
DIELECTRIC STRENGTH—1,000 volts RMS @ sea level.
OPERATING TEMPERATURE— –20°C to 65°C

Order guide: 型號說明

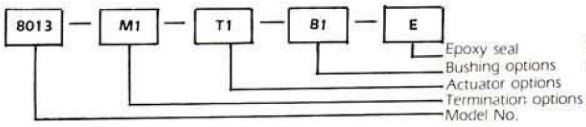

① If customer do not indicate the complete option, we'll supply standard **(STD)** type.
② Available options for T80 series are shown on page 10.
①如果客戶未指明，將以提供"標準品"爲準
②請參閱第10頁圖樣說明

Series T80 5A 125VAC or 28VDC，2A 250VAC


SPDT




Model No.	Switching Position		
8013	ON	NONE	ON
8013A	ON	NONE	(ON)
8014	ON	OFF	ON
8014A	(ON)	OFF	(ON)
8014B	ON	OFF	(ON)
Term CONN	2-3	OPEN	2-1

Schematic






DPDT

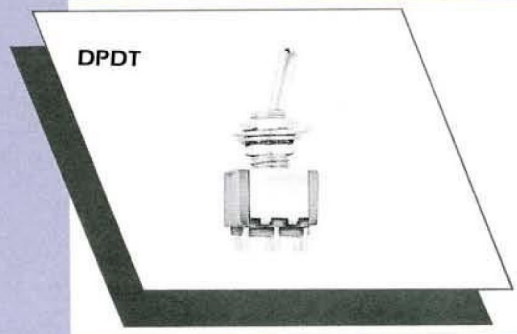


Model No.	Switching Position		
8011	ON	NONE	ON
8011A	ON	NONE	(ON)
8012	ON	OFF	ON
8012A	(ON)	OFF	(ON)
8012B	ON	OFF	(ON)
Term CONN	2-3, 5-6	OPEN	2-1, 5-4

Schematic



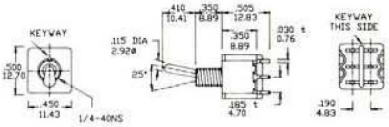


3PDT

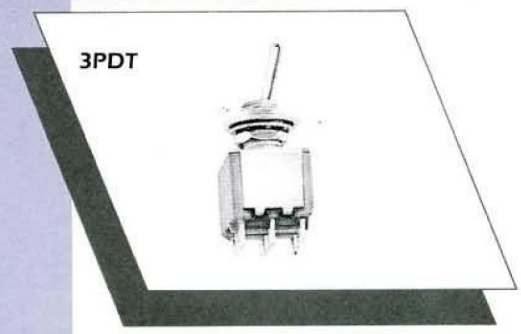


Model No.	Switching Position		
T8301	ON	NONE	ON
T8303	ON	NONE	(ON)
T8305	ON	OFF	ON
T8307	(ON)	OFF	(ON)
T8309	ON	OFF	(ON)
Term CONN	2-3, 5-6 8-9	OPEN	2-1, 5-4 8-7

Schematic



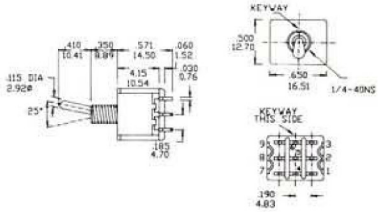


4PDT

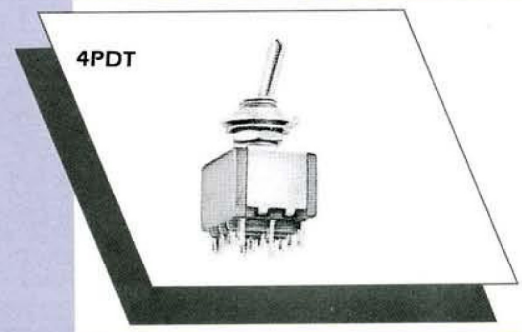

Model No.	Switching Position		
T8401	ON	NONE	ON
T8403	ON	NONE	(ON)
T8405	ON	OFF	ON
T8407	(ON)	OFF	(ON)
T8409	ON	OFF	(ON)
Term CONN	2-3, 5-6 8-9, 11-12	OPEN	2-1, 5-4 8-7, 11-10

Schematic



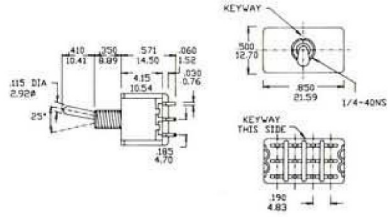


MINIATURE TOGGLE SWITCH
小型雙投開關

SPECIFICATIONS

CONTACT RATING—0.4 Volt-Amps (VA) max. @ 20V max. (AC or DC)
ELECTRICAL LIFE—50,000 make-and-break cycles at full load
CONTACT RESISTANCE—10 milliohms max. initial @ 2-4VDC, 100 milliamps for both coin silver and gold plated contacts.
INSULATION RESISTANCE—100 megohms min.
DIELECTRIC STRENGTH—1,000 volts RMS @ sea level.
OPERATING TEMPERATURE— –20°C to 65°C


Order guid: 型號說明



① If customer do not indicate the complete option, we'll supply standard **(STD)** type.
② Available options for PT80 series are shown on page 10.
①如果客戶未指明，將以提供"標準品"爲準
②請參閱第10頁圖標說明

Series PT80 P.C. Mounted


5A 125VAC or 28VDC , 2A 250VAC

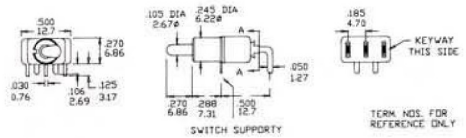


Model No.	Switching Position		
	1	2	3
8019	ON	NONE	ON
8019A	ON	NONE	(ON)
8020	ON	OFF	ON
8020A	(ON)	OFF	(ON)
8020B	ON	OFF	(ON)
Term CONN	2-3	OPEN	2-1

Schematic



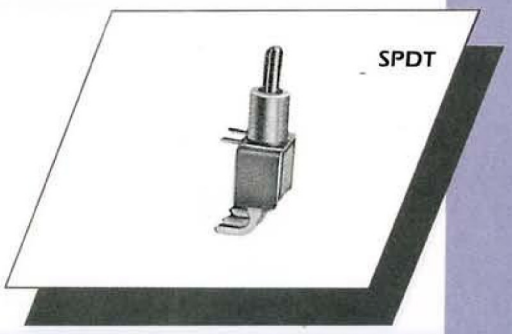


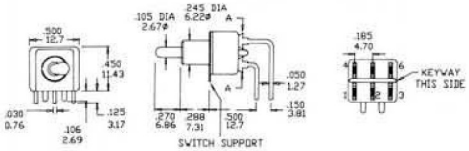


Model No.	Switching Position		
	1	2	3
8021	ON	NONE	ON
8021A	ON	NONE	(ON)
8022	ON	OFF	ON
8022A	(ON)	OFF	(ON)
8022B	ON	OFF	(ON)
Term CONN	2-3, 5-6	OPEN	2-1, 5-4

Schematic



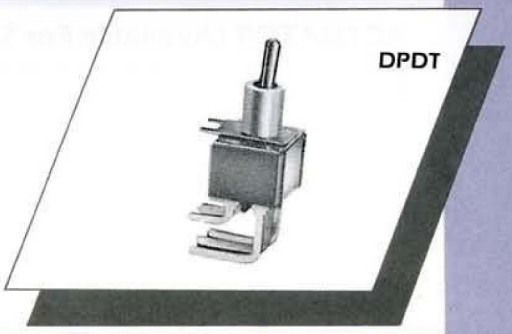


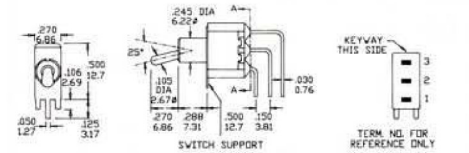


Model No.	Switching Position		
	1	2	3
8019L	ON	NONE	ON
8019LA	ON	NONE	(ON)
8020L	ON	OFF	ON
8020LA	(ON)	OFF	(ON)
8020LB	ON	OFF	(ON)
Term CONN	2-3	OPEN	2-1

Schematic



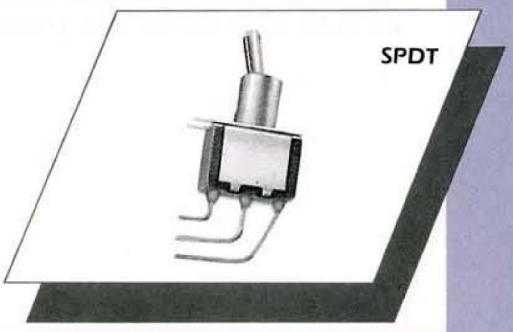


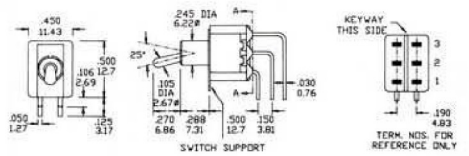

Model No.	Switching Position		
	1	2	3
8021L	ON	NONE	ON
8021LA	ON	NONE	(ON)
8022L	ON	OFF	ON
8022LA	(ON)	OFF	(ON)
8022B	ON	OFF	(ON)
Term CONN	2-3, 5-6	OPEN	2-1, 5-4


Schematic



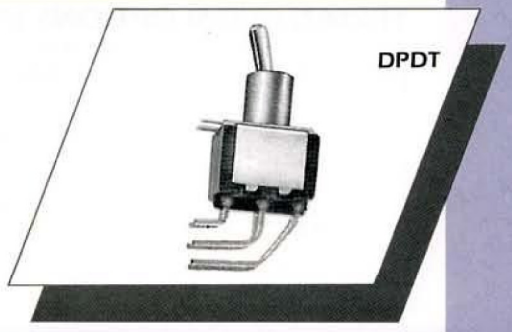

MINIATURE TOGGLE SWITCH
小型雙投開關


Series PT80 P.C. Mounted

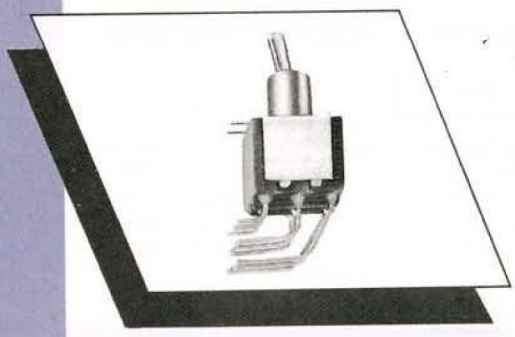

Model No.	Switching Position		
PT8301	ON	NONE	ON
PT8303	ON	NONE	(ON)
PT8305	ON	OFF	ON
PT8307	(ON)	OFF	(ON)
PT8309	ON	OFF	(ON)
Term CONN	2-3, 5-6 8-9	OPEN	2-1, 5-4 8-7

Schematic



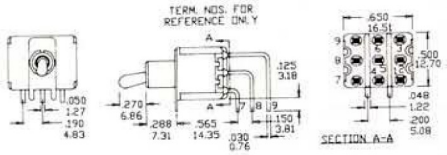





Model No.	Switching Position		
PT8401	ON	NONE	ON
PT8403	ON	NONE	(ON)
PT8405	ON	OFF	ON
PT8407	(ON)	OFF	(ON)
PT8409	ON	OFF	(ON)
Term CONN	2-3, 5-6 8-9, 11-12	OPEN	2-1, 5-4 8-7, 11-10

Schematic




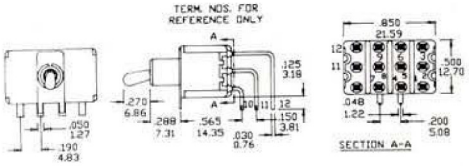


ACTUATOR (Available For Series T80)

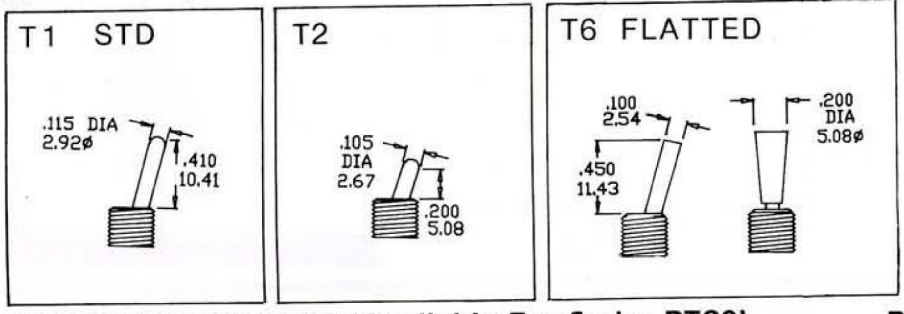


BUSHING OPTIONS

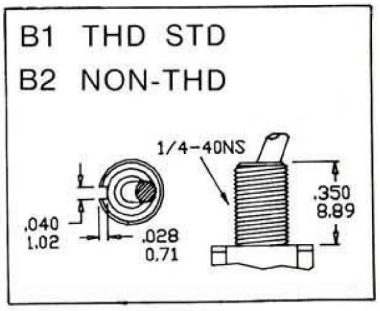

ACTUATOR OPTIONS (Available For Series PT80)

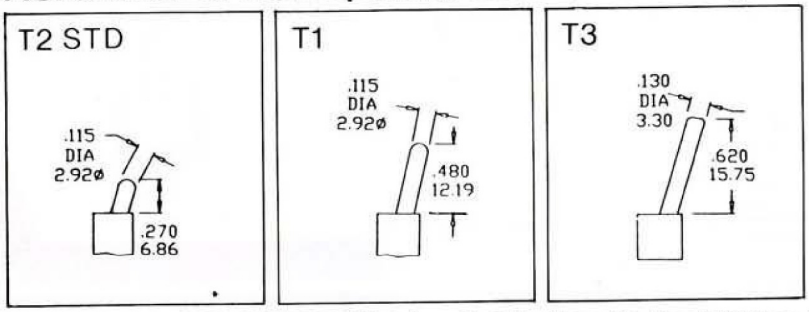

BUSHING OPTIONS

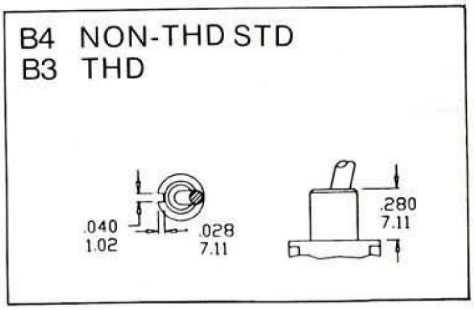

TERMINATION OPTIONS (Available For Series T80or R80)

