
WPT SERIES Pushbutton Switch

RoHS Compliant




SPECIFICATIONS


RATING : AC 0.2A/125V DC 1A/25V
CONTACT RESISTANCE : 40mΩ at 1KHz
INSULATION RESISTANCE : 100Mohm min at 500V DC
VOLTAGE BREAKDOWN : 500VDC / 1 minute
WORKING TEMPERATURE RANGE : -20˚C ~ +70˚C
OPERATING LIFE: 10,000 cycles
OPERATING FORCE: 350 ± 150gf (2P2T~8P2T), 600 ± 150gf (10P2T, 16P2T)

FRAME TYPE


S Type




M Type




H Type




POLE

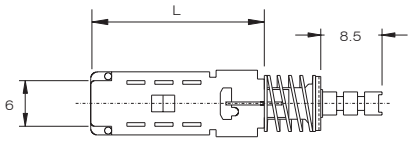


POLE	2	4	6	8	10	16
L(mm)	24.5	36.5	48.5	60.5	72.5	108.5



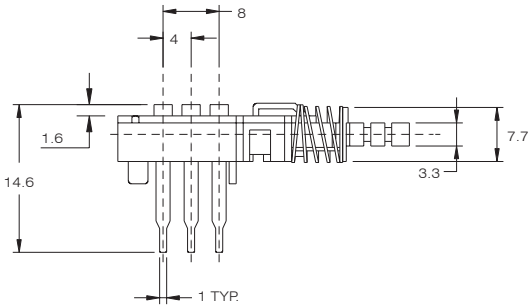

TERMINAL TYPE

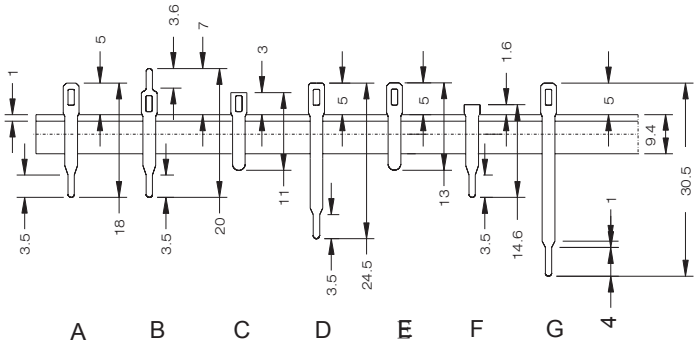

OPERATION	L: LOCK IL: INTERLOCK N: NONLOCK R: RESET
TIMING	S: SHORTING N: NONSHORTING
TRAVEL	2: 2.5MM 4: 4MM
IL and RESET	

Multi-key type is in the next page.

Interlock(lock release)	When a key is depressed,the other key having previously been locked is released and the depressed key is locked.
Self-lock(latching)	Operation independent from other keys. A key is locked when it is depressed, and released when depressed again.
Non-lock(momentary)	A key is held depressed while it is being pressed down,and released when the pressing force is eliminated.
Reset	Operation for releasing the key locked in the interlock mode. A key previously locked is released when this reset key is depressed,and locked again when the key is released.This mode is available only in the switch with 0, 2 and 4 poles.

HOW TO ORDER

SERIES	FRAME	POLE	TERMINAL	OPERATION	TIMING	TRAVEL	KNOB	RoHS code

☐ = none
H = RoHS Compliant