
datasheet for BUELA 20 K
article number: 930726100

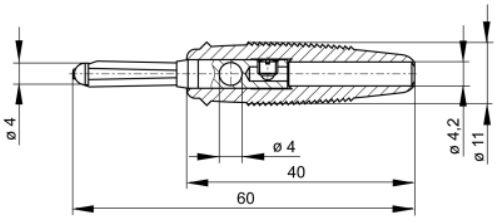

SKS Kontakttechnik GmbH

product description:	order number: 930 726-100
description:	Multiple-spring wire plug, shatter-proof, flexible insulated sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead.Screw connection up to maximum cable cross-section of 1.5 mm². Nickel-plated brass contact material.
typ:	BUELA 20 K schwarz/black
system:	4mm system
order number:	930 726-100
color	●
other color versions:	●●●●● ○
technical data	
measurement category acc. to IEC 61010:	CAT I
pin dimensions	4 mm
type of contact:	pin (spring loaded)
type of termination:	screw
rated voltage:	30 VAC / 60 VDC
rated current: Please consider derating curve!	16 A
contact resistance:	3 mOhm
material	
contact material:	brass
contact surface material:	nickel
housing material:	PVC - P
environmental conditions:	
temperature range:	-25 °C to +70 °C
drawing	
	

Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Tue Mar 19 2013 13:55:12)