

R13-213

Screw Type



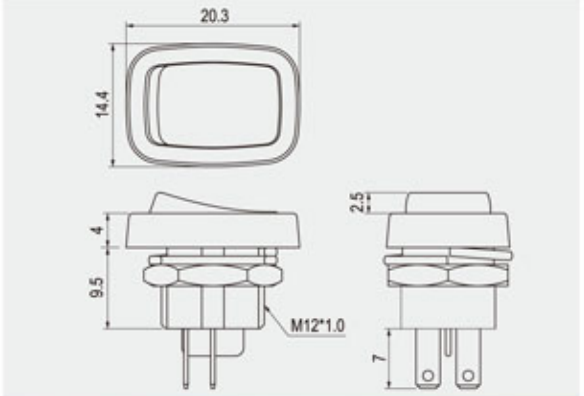

Rating
6A 125V AC 3A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out



6 mm max

FEATURES

* MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
* Specially for compact room design.
* Mounted by nut thread in.

R13-213 □ - □□

FUNCTION	TERMINAL
A 2P SPST (OFF / ON) C 3P SPDT (ON / ON) B 6P DPDT (ON / ON) F 4P DPST (OFF / ON)	0 3 .110" SQ