小型波动开关 Miniature Rocker Switch MRS Series
小型带灯波动开关 Miniature Illuminated Rocker Switch MIRS Series

型号说明 Ordering Information

MRS-102A-2C7-R/B

- 基座颜色 Base color
- 盖帽颜色 Cap color
- 盖帽标记 Cap marking
- 产品序号 Product order
- 规格 Rating
- 电路特性 Circuitry trait
- 刀数 Poles
- 小型带灯波动开关 Miniature Illuminated Rocker Switch
- 小型波动开关 Miniature Rocker Switch

技术特性 Specification

1.规格 Rating: ( )6A 125VAC;3A 250VAC
(A)10A 125VAC;6A 250VAC
2.接触电阻 Contact Resistance:35mΩ max
3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
4.耐电压 Dielectric Strength:1500VAC, 1Minute
5.操作温度 Operating Temperature:-25℃ ~ +85℃
6.电气寿命 Electrical Life:10,000 Cycles

电路特性 Circuitry trait

01	ON	–	OFF
02	ON	–	ON
11	(ON)		OFF
12	ON	–	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

( ):回弹指示 Indicates Momentary


盖帽颜色 Cap color

黑 Black	(B)
白 White	(W)
红 Red	(R)
黄 Yellow	(Y)
绿 Green	(G)
蓝 Blue	(BL)
桔黄 Orange	(O)
灰 Gray	(GR)

基座颜色 Base color

黑 Black	(B)
白 White	(W)
灰 Gray	(GR)

盖帽标记 Cap marking

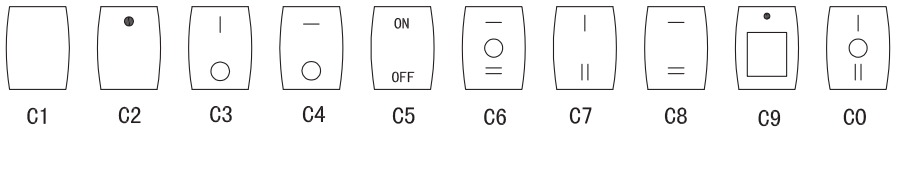


防水罩 Water proof cap

WPC-07






MRS-101 ON-OFF
MRS-111 (ON)-OFF
MRS-101A ON-OFF
MRS-111A (ON)-OFF
SPST 2P

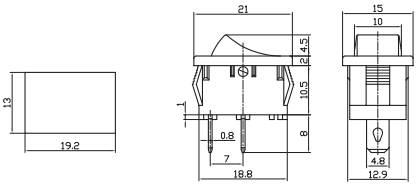




MRS-102 MRS-102A ON-ON
MRS-103 MRS-103A ON-OFF-ON
MRS-112 MRS-112A ON-(ON)
SPDT 3P

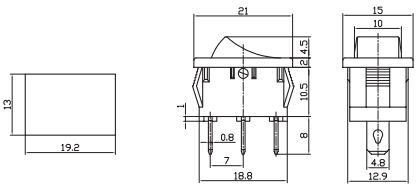





MRS-2-101-2 ON-OFF
MRS-2-101A-2 ON-OFF
SPST 2P
MIRS-101 ON-OFF
MIRS-101A ON-OFF
SPST 3P

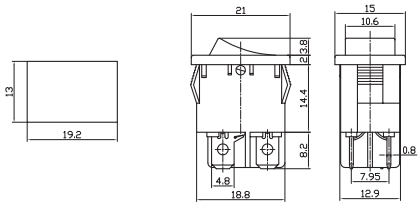

小型波动开关 Miniature Rocker Switch MRS Series
小型带灯波动开关 Miniature Illuminated Rocker Switch MIRS Series





MIRS-201 ON-OFF
MIRS-201A ON-OFF
MRS-201-2 ON-OFF
MRS-201A-2 ON-OFF
DPST 4P





MIRS-101-2 ON-OFF
10A 125VAC;6A 250VAC
SPST 3P





MRS-101-2 ON-OFF
MRS-101A-2 ON-OFF
SPST 2P





MRS-102-2 MRS-102A-2 ON-ON
MRS-103-2 MRS-103A-2 ON-OFF-ON
MRS-113-2 MRS-113A-2 ON-OFF-(ON)
MRS-123-2 MRS-123A-2 (ON)-OFF-(ON)
SPDT 3P





MRS-101L-2 ON-OFF
MRS-101AL-2 ON-OFF
SPST 2P





MRS-102L-2 ON-ON
MRS-102AL-2 ON-ON
MRS-103L-2 ON-OFF-ON
MRS-103AL-2 ON-OFF-ON
SPDT 3P




MIRS-101-3+LED ON-OFF
6A 125VAC; 3A 250VAC
SPST 4P




MRS-101A-4 ON-OFF
10A 125VAC; 6A 250VAC
SPST 2P



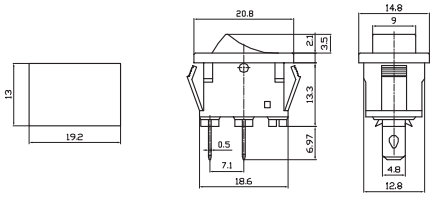


MRS-102A-4 ON-ON
MRS-103A-4 ON-OFF-ON
10A 125VAC; 6A 250VAC
SPDT 3P

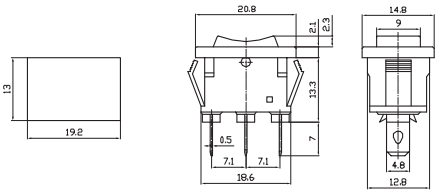




MRS-101-5 ON-OFF
MRS-111-5 (ON)-OFF
10A 125VAC;6A 250VAC
SPST 2P

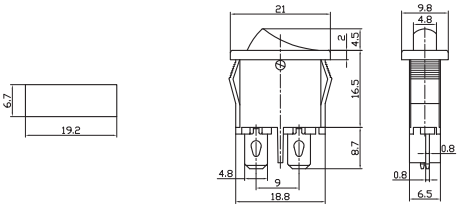




MRS-102-6 ON-ON
12A 125VAC;6A 250VAC
SPDT 3P

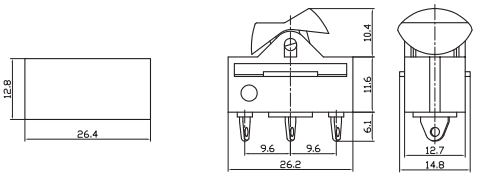




MRS-101-7 ON-OFF
10A 125VAC;6A 250VAC
SPST 2P

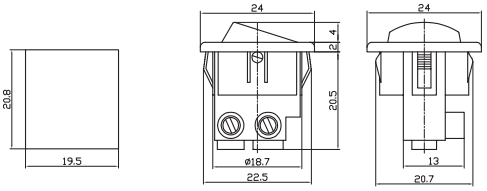




MRS-101-8 ON-OFF
13A 125VAC;6.5A 250VAC
SPST 2P

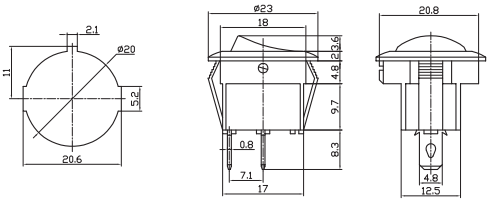



MIRS-101-8 ON-OFF
SPST 3P
MRS-102-8 ON-ON
MRS-103-8 ON-OFF-ON
13A 125VAC;6.5A 250VAC
SPDT 3P

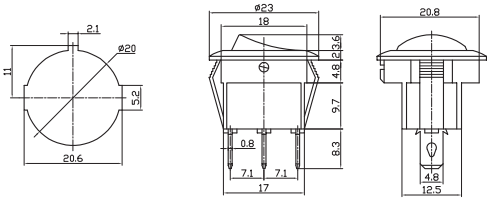




MRS-101-9 ON-OFF

10A 125VAC;6A 250VAC

SPST 2P

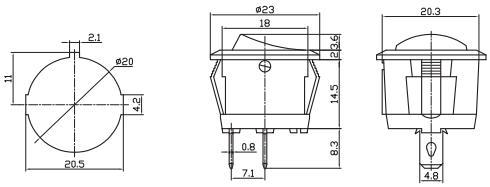



MIRS-101-9 ON-OFF


SPST 3P

MRS-102-9 ON-ON

MRS-103-9 ON-OFF-ON

10A 125VAC;6A 250VAC

SPDT 3P

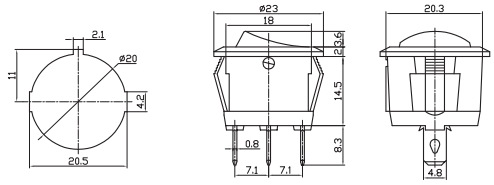




MRS-101-9H ON-OFF

10A 125VAC;6A 250VAC

SPST 2P

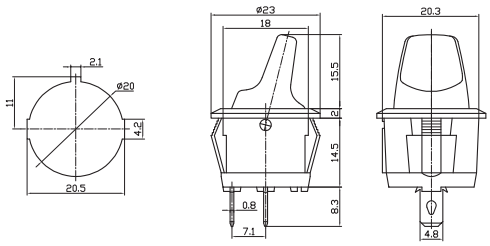



MIRS-101-9H ON-OFF


SPST 3P

MRS-102-9H ON-ON

MRS-103-9H ON-OFF-ON

10A 125VAC;6A 250VAC

SPDT 3P

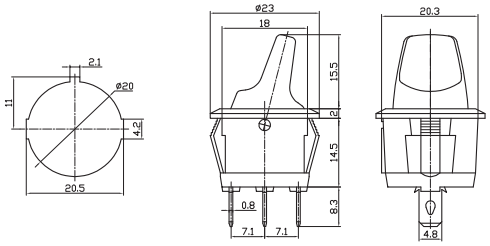




MRS-101-10 ON-OFF

10A 125VAC;6A 250VAC

SPST 2P

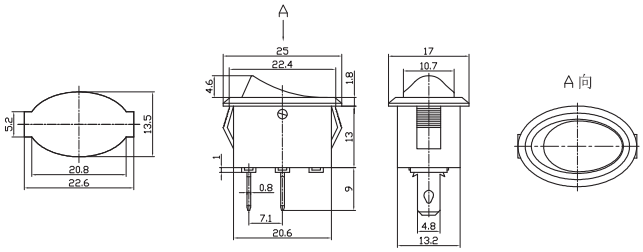




MIRS-101-10 ON-OFF

10A 125VAC;6A 250VAC

SPST 3P

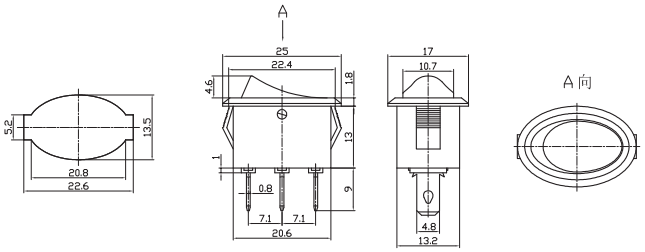




MRS-103-12

10A 125VAC;6A 250VAC

MRS-103A-12


16A 125VAC;10A 250VAC


ON-ON-OFF SPDT 3P






MRS-201 ON-OFF
MRS-211 (ON)-OFF
MRS-201A ON-OFF
MRS-211A (ON)-OFF
DPST 4P









MRS-202 ON-ON
MRS-203 ON-OFF-ON
MRS-202A ON-ON
MRS-203A ON-OFF-ON
DPDT 6P









MRS-202P ON-ON
MRS-203P ON-OFF-ON
MRS-202AP ON-ON
MRS-203AP ON-OFF-ON
DPDT 6P










MRS-2101 ON-OFF
MRS-2111 (ON)-OFF
MRS-2101A ON-OFF
MRS-2111A (ON)-OFF
DPST 4P









MRS-2102 ON-ON
MRS-2103 ON-OFF-ON
MRS-2102A ON-ON
MRS-2103A ON-OFF-ON
DPDT 6P









MIRS-101AE-111A ON-ON/(ON)-OFF
20A 12VDC
DPST 5P










MIRS-2101AE ON-OFF
20A 12VDC
DPST 6P









MRS-201-3 ON-OFF
DPST 4P
L1=3; 8
L2=5.5; 9





MRS-202-3 ON-ON
MRS-203-3 ON-OFF-ON
DPDT 6P
L1=3; 8
L2=5.5; 9





MIRS-201-4 ON-OFF
MRS-201-4 ON-OFF
10A 125VAC;6A 250VAC
DPST 4P





MIRS-202-4 ON-ON
10A 125VAC;6A 250VAC
DPDT 6P





MRS-201-5 ON-OFF
MRS-211-5 (ON)-OFF
10A 125VAC;6A 250VAC
DPST 4P



MRS-202-5 ON-ON
MRS-203-5 ON-OFF-ON
MRS-212-5 (ON)-ON
MRS-213-5 (ON)-OFF-ON
MRS-223-5 (ON)-OFF-(ON)
10A 125VAC;6A 250VAC
DPDT 6P



MIRS-101-5 ON-OFF
10A 125VAC;6A 250VAC
SPST 3P

