小型摇臂开关 Miniature Rocker and Lever Handle Switch RLS Series

CQC CE RoHS

型号说明 Ordering Information

RLS-102-A2T

- 支架 Support bracket
- 端子种类 Terminal options
- 摇臂种类 Rocker options
- 电路特性 Circuitry trait
- 刀数 Poles
- 摇臂开关 Rocker and lever handle Switch

技术特性 Specification






1.规格 Rating:6A 125VAC;3A 250VAC
2.接触电阻 Contact Resistance:20mΩ max
3.绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
4.耐电压 Dielectric Strength:1500VAC, 1Minute
5.操作温度 Operating Temperature:-25℃ ~ +85℃
6.电气寿命 Electrical Life:10,000 Cycles

电路特性Circuitry trait


02	ON	-	ON
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)


( ) :回弹指示 Indicates Momentary

端子种类Terminal options


Solder terminal (1)	PC terminal (2)	PC-H terminal (3)	PC-V terminal (4)	Long Solder terminal (5)
				


摇臂种类 Rocker options

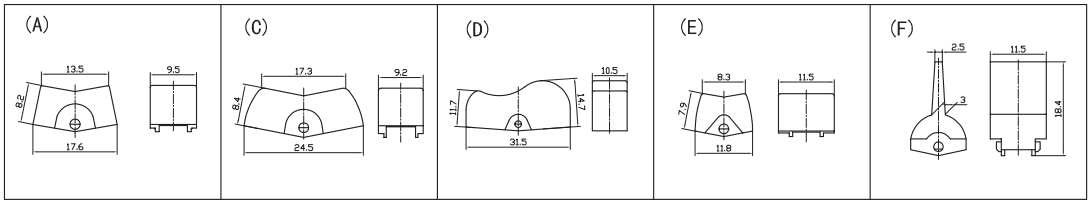




RLS-102-A1 ON-ON
RLS-112-A1 ON-(ON)
RLS-103-A1 ON-OFF-ON
RLS-113-A1 ON-OFF-(ON)
RLS-123-A1 (ON)-OFF-(ON)
SPDT 3P

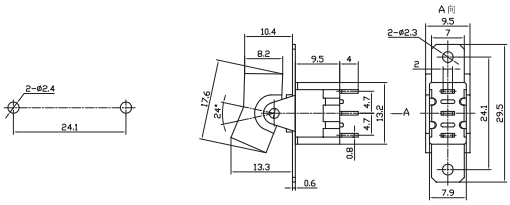




RLS-202-A1 ON-ON
RLS-212-A1 ON-(ON)
RLS-203-A1 ON-OFF-ON
RLS-213-A1 ON-OFF-(ON)
RLS-223-A1 (ON)-OFF-(ON)
DPDT 6P

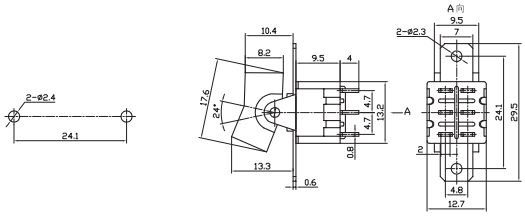




RLS-302-A1 ON-ON
RLS-303-A1 ON-OFF-ON
3PDT 9P

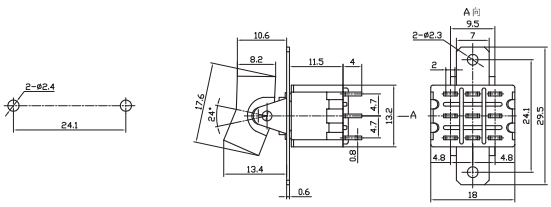




RLS-102-A2T ON-ON
RLS-112-A2T ON-(ON)
RLS-103-A2T ON-OFF-ON
RLS-113-A2T ON-OFF-(ON)
RLS-123-A2T (ON)-OFF-(ON)
SPDT 3P

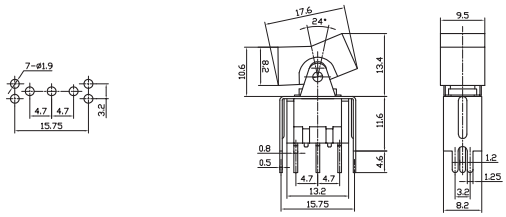

小型摇臂开关 Miniature Rocker and Lever Handle Switch RLS Series





RLS-202-A2T ON-ON
RLS-212-A2T ON-(ON)
RLS-203-A2T ON-OFF-ON
RLS-213-A2T ON-OFF-(ON)
RLS-223-A2T (ON)-OFF-(ON)
DPDT 6P

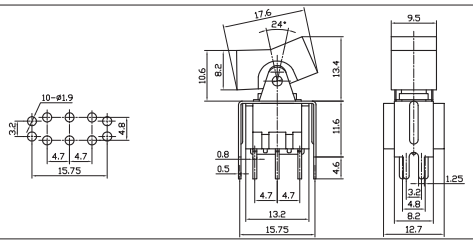





RLS-102-A3 ON-ON
RLS-112-A3 ON-(ON)
RLS-103-A3 ON-OFF-ON
RLS-113-A3 ON-OFF-(ON)
RLS-123-A3 (ON)-OFF-(ON)
SPDT 3P

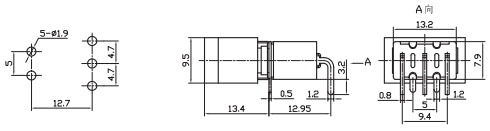




RLS-102-A3T ON-ON
RLS-112-A3T ON-(ON)
RLS-103-A3T ON-OFF-ON
RLS-113-A3T ON-OFF-(ON)
RLS-123-A3T (ON)-OFF-(ON)
SPDT 3P

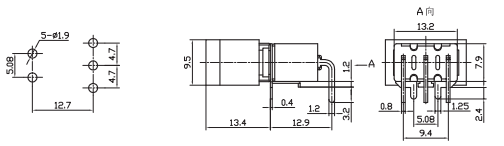




RLS-202-A3 ON-ON
RLS-212-A3 ON-(ON)
RLS-203-A3 ON-OFF-ON
RLS-213-A3 ON-OFF-(ON)
RLS-223-A3 (ON)-OFF-(ON)
DPDT 6P

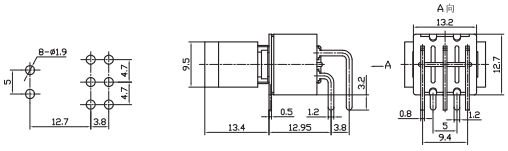




RLS-102-A4 ON-ON
RLS-112-A4 ON-(ON)
RLS-103-A4 ON-OFF-ON
RLS-113-A4 ON-OFF-(ON)
RLS-123-A4 (ON)-OFF-(ON)
SPDT 3P

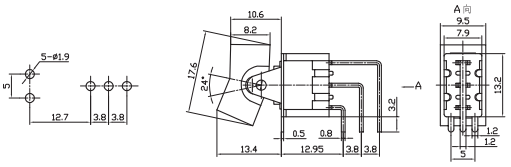




RLS-202-A4 ON-ON
RLS-212-A4 ON-(ON)
RLS-203-A4 ON-OFF-ON
RLS-213-A4 ON-OFF-(ON)
RLS-223-A4 (ON)-OFF-(ON)
DPDT 6P

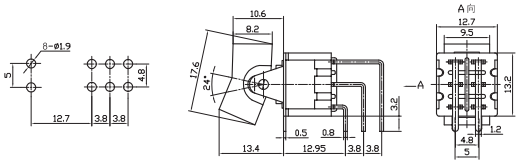




RLS-102-A4T ON-ON
RLS-112-A4T ON-(ON)
RLS-103-A4T ON-OFF-ON
RLS-113-A4T ON-OFF-(ON)
RLS-123-A4T (ON)-OFF-(ON)
SPDT 3P

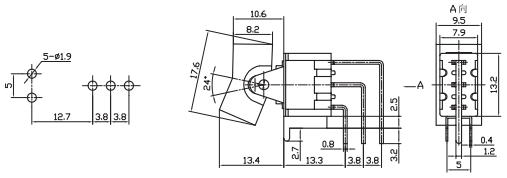




RLS-202-A4T ON-ON
RLS-212-A4T ON-(ON)
RLS-203-A4T ON-OFF-ON
RLS-213-A4T ON-OFF-(ON)
RLS-223-A4T (ON)-OFF-(ON)
DPDT 6P

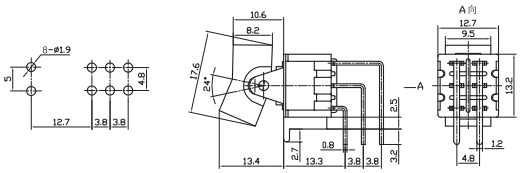


小型摇臂开关 Miniature Rocker and Lever Handle Switch RLS Series




RLS-102-C1 ON-ON
RLS-112-C1 ON-(ON)
RLS-103-C1 ON-OFF-ON
RLS-113-C1 ON-OFF-(ON)
RLS-123-C1 (ON)-OFF-(ON)
SPDT 3P










RLS-202-C1 ON-ON
RLS-212-C1 ON-(ON)
RLS-203-C1 ON-OFF-ON
RLS-213-C1 ON-OFF-(ON)
RLS-223-C1 (ON)-OFF-(ON)
DPDT 6P










RLS-102-D1 ON-ON
RLS-112-D1 ON-(ON)
RLS-103-D1 ON-OFF-ON
RLS-113-D1 ON-OFF-(ON)
RLS-123-D1 (ON)-OFF-(ON)
SPDT 3P










RLS-202-D1 ON-ON
RLS-212-D1 ON-(ON)
RLS-203-D1 ON-OFF-ON
RLS-213-D1 ON-OFF-(ON)
RLS-223-D1 (ON)-OFF-(ON)
DPDT 6P




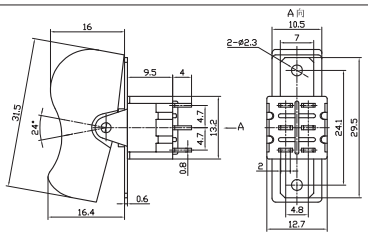





RLS-102-E5 ON-ON
RLS-103-E5 ON-OFF-ON
SPDT 3P









RLS-202-E5 ON-ON
RLS-203-E5 ON-OFF-ON
DPDT 6P








RLS-102-F1 ON-ON
RLS-112-F1 ON-(ON)
RLS-103-F1 ON-OFF-ON
RLS-113-F1 ON-OFF-(ON)
RLS-123-F1 (ON)-OFF-(ON)
SPDT 3P







RLS-202-F1 ON-ON
RLS-212-F1 ON-(ON)
RLS-203-F1 ON-OFF-ON
RLS-213-F1 ON-OFF-(ON)
RLS-223-F1 (ON)-OFF-(ON)
DPDT 6P

